

## Wire Shelf and Bracket Cover

Snap in wire shelf, baskets and bracket cover


### TIP

Install the wire shelves from shortest to longest, regardless of their location in the space.

Wire shelves have a top and a bottom. The middle support wire(s) is connected to the bottom of the shelf.

Install gliding components and hanging drawers before installing wire shelves.

1

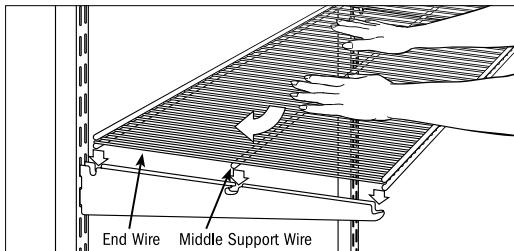


### Install the wire shelves

Place the shelf wires over bracket click in notches. Install the shelf with end wires inside the brackets. Lock the shelf into place by pressing down on the middle of the shelf and pushing toward the wall.

To REPOSITION a wire shelf after it's been attached to the brackets: Hold by the brackets, and lift the front of the shelf toward the ceiling and outward to release the entire unit from the hang standards. (Works on all shelves except 20"/494 mm depth.)

To REMOVE a wire shelf from a bracket while on the hang standards: Hold the hang standard steady with one hand. Place the other hand at the back of the shelf. Pull up and forward to release.

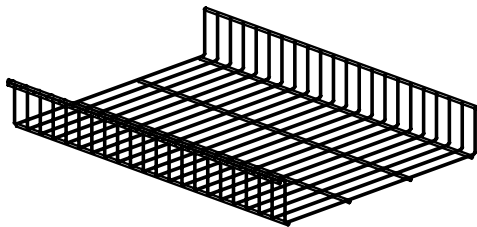

### Install wire shelf baskets (not shown)


With the double wire front lip of the wire shelf basket facing forward, place the wire shelf basket wires over the bracket click in notches.

Install the wire shelf basket with the end wires inside the bracket.

Lock the wire shelf basket into place by pressing down on the middle of the wire shelf basket and pushing toward the wall.

Insert wire shelf basket dividers where desired, if applicable.

2

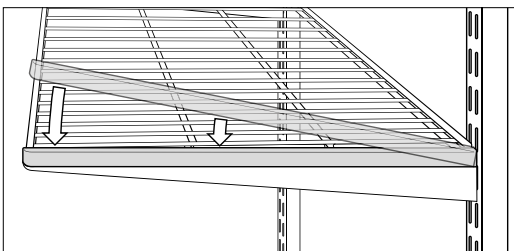

### Bracket cover installation

Left and right bracket covers are not interchangeable.

Place the outer edge of the bracket cover over the outer edge of the bracket click in.

Push down from the back to the front to snap the bracket cover in place.